

Epoch-S100/215-W

Outdoor Cabinet Air Cooling Energy Storage System

Epoch-S100/215-W is new outdoor cabinet air cooling energy storage system developed by LEOCH, which integrates battery energy storage units, intelligent PCS, battery management system, air cooling system, fire protection system and energy management system. It adopts AC-DC integrated design, three-level topological structure and the most advanced high-efficiency energy storage integrated technology in the market, it has the characteristics of high charging and discharging and thermal management efficiency, multiple safety designs and small floor space. It can be applied to peak shaving and valley filling, emergency power backup, demand control, microgrids and more severe application environment.



Highly Integration

All-in-one Design, simple installation, easy maintenance, saves space and costs



Safe and Reliable

Multiple fire protection design, cell level temperature detection+PACK level+cabinet level perfluorohexane fire protection+water fire protection




Modular Design

More flexible configuration, multiple parallel connections, fast response, and ensuring continuous uninterrupted power supply for critical loads



Intelligent Operation and Maintenance

The entire network's energy storage is visible and manageable, improving system reliability, stability, operation and maintenance efficiency, and optimizing system performance

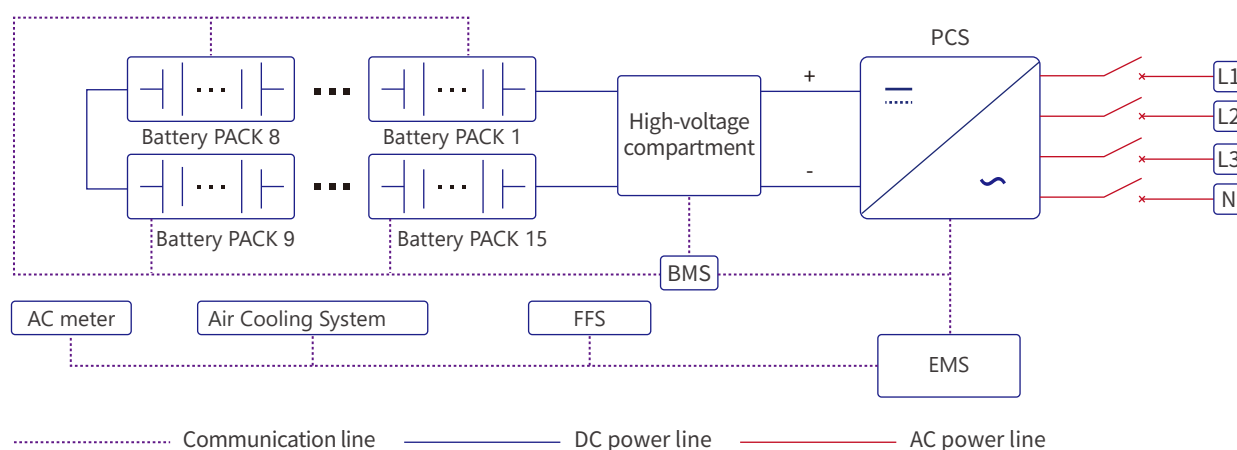

Outdoor Cabinet Air Cooling Energy Storage System



System Model	Epoch-S100/215-W
Battery Parameters	
Cell Type	LFP3.2V/280Ah
Battery PACK Type	1P16S
Cluster Configuration	1P240S
Nominal Energy	215kWh
Battery Voltage Range	672V~864V
Charge-Discharge Efficiency	≥95%
AC Parameters(Grid Mode)	
Rated Power	100kW
Rated Voltage	400V,3P4W
Rated Current	144A
Overload Capacity	110% Long term
Rated Grid Frequency	50Hz/60Hz self-adaption
Power Factor	0.99
Power Factor Range	-1~1
Current Distortion Rate	<3% (Rated power)
DC Component	0.5%
AC parameters(Islanded Mode)	
Rated Power	100kW
Rated Voltage	400V,3P4W
Rated Current	144A
Rated Frequency	50Hz/60Hz
With Unbalanced Load Capacity	100%
System Parameters	
Charge and Discharge Rate	≤0.5C
Dimension(W*D*H)	1560*1235*2325mm
Weight	About 2.8t
IP Level	IP54
Altitude	2000m (> 2000m derated use)
Operating Temperature	-25°C~55°C
Relative Humidity	0~95% No condensation
Cooling Method (PCS)	Intelligent air cooling
Cooling Method (Battery Compartment)	Air cooled air conditioner
Fire Protection System	Cabinet-level perfluorohexanone firefighting+Water firefighting(Optional aerosols)
Communication Interface	RS485,CAN,Ethernet,Dry contact
Certifications	UN38.3